

Hook Switch

Q-1075


TYPE: **HS010-A2-N**

SPECIFICATIONS



| | |
|-----------------------------|--------------------|
| Rating | DC 48V, 20mA |
| Contacts Resistance | 100MΩ Max |
| Insulation Resistance | 100MΩ Min |
| Minimum Load | DC 500V |
| Dielectric Strengths | AC 500V / 1 minute |
| Life Test | 500 000 Cycles Min |
| Operating temperature range | -25°C to +65°C |
| Operating Force | 200 ± 50gf |


Outline Drawing

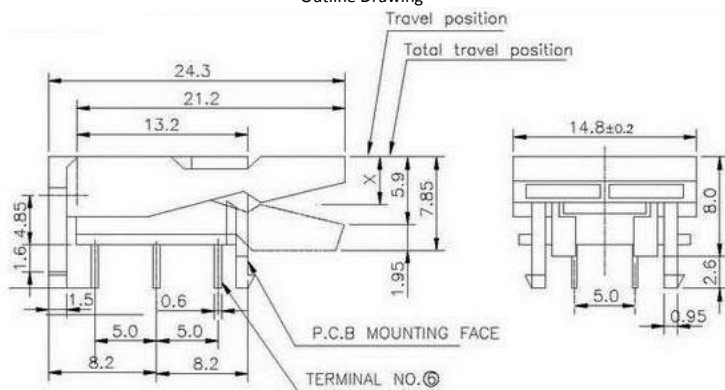


Mounting

Circuitry

P.C.B HOLE DETAIL



Time lag diagram

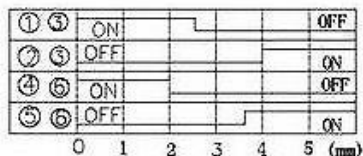

Сеть магазинов

КВАРЦ

Радиодетали и электронные компоненты

107023, Москва, ул. Буженинова, д. 16

телефон: (495) 963-6120

факс: (495) 963-4994

e-mail: quartz1@quartz1.ru

111123, Москва, шоссе Энтузиастов, д31

телефон/факс: (495) 788-8899 *многоканальный*

e-mail: mqz@quartz1.ru