



F130 серии

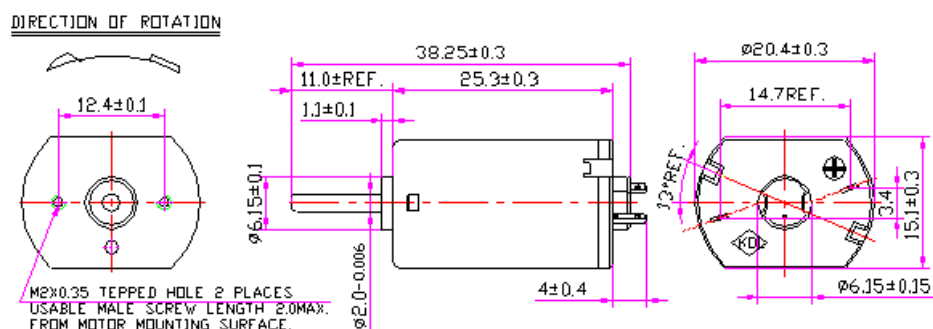

UNIT: MILLIMETERS

WEIGHT: 69g (APPROX)



| Модель | Напряжение | | Без нагрузки | | С максимальной эффективностью | | | | | При остановке | |
|--------------------|------------|-------------|----------------------|----------|-------------------------------|----------|-------------------------|------------|----------|-------------------------|----------|
| | Диапазон | Номинальное | Скорость об / мин | Ток А | Скорость об / мин | Ток А | Крутящий момент г-см | Выход W | КПД % | Крутящий момент г-см | Ток А |
| F130-2190 | 0.7-3.6 | 3.0 | 7000 | 0.115 | 5685 | 0.497 | 14.1 | 0.82 | 55.1 | 75 | 2.15 |
| F130-1995 | 1.2-3.6 | 2.4 | 5250 | 0.095 | 4180 | 0.371 | 11.21 | 0.48 | 53.9 | 55 | 1.45 |
| F130-17100 | 1.2-5.0 | 3.0 | 6000 | 0.10 | 4735 | 0.374 | 12.02 | 0.58 | 52.0 | 57 | 1.40 |
| F130-17100 | 1.2-5.0 | 5.0 | 10300 | 0.11 | 8418 | 0.49 | 17.36 | 1.50 | 60.9 | 95 | 2.20 |
| F130-15155 | 1.0-5.0 | 1.5 | 2100 | 0.050 | 1559 | 0.144 | 5.93 | 0.10 | 43.9 | 23 | 0.42 |
| F130-15155 | 1.0-5.0 | 2.0 | 3000 | 0.050 | 2305 | 0.166 | 6.72 | 0.16 | 47.9 | 29 | 0.55 |
| F130-15155 | 1.0-5.0 | 4.5 | 6800 | 0.065 | 5516 | 0.279 | 11.89 | 0.67 | 53.5 | 63 | 1.20 |
| F130-13180 | 1.0-6.0 | 3.0 | 3600 | 0.045 | 2782 | 0.153 | 8.18 | 0.23 | 50.9 | 36 | 0.51 |
| F130-13180 | 1.0-6.0 | 5.0 | 6050 | 0.055 | 4800 | 0.211 | 12.4 | 0.61 | 57.9 | 60 | 0.81 |
| F130-12260 | 1.0-6.0 | 3.0 | 2500 | 0.030 | 1880 | 0.095 | 6.73 | 0.13 | 45.5 | 28 | 0.30 |
| F130-09350 | 3.0-12.0 | 5.0 | 3000 | 0.024 | 2255 | 0.073 | 6.95 | 0.16 | 44.3 | 28 | 0.22 |
| F130-09350 | 3.0-12.0 | 7.0 | 4350 | 0.025 | 3304 | 0.087 | 8.90 | 0.30 | 49.4 | 40 | 0.305 |
| F130-09350 | 3.0-12.0 | 12.0 | 7500 | 0.028 | 6093 | 0.121 | 12.76 | 0.80 | 54.8 | 68 | 0.525 |
| F130-08450 | 2.4-13.8 | 3.0 | 1400 | 0.017 | 1023 | 0.034 | 3.06 | 0.032 | 31.5 | 10 | 0.08 |
| F130-08450 | 2.4-13.8 | 6.0 | 2800 | 0.025 | 2007 | 0.063 | 7.08 | 0.15 | 38.4 | 25 | 0.16 |
| F130-08450 | 2.4-13.8 | 12.0 | 5800 | 0.032 | 4407 | 0.101 | 13.45 | 0.61 | 50.1 | 56 | 0.32 |
| Разброс параметров | | ± 15% | | | | | | | | | |