


## БАТАРЕЙНЫЕ ОТСЕКИ



BH142D For four «D» Cells (with «2C» contact)

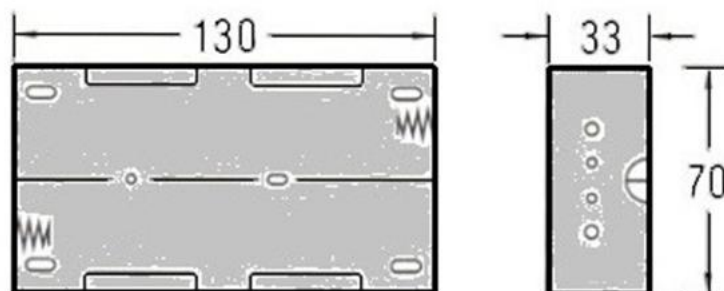

HOUSING : BLACK POLYPROPYLENE  
FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959  
TEMPERATURE RANGE: -10°C to +100°C  
RIVETS: BRASS, NICKEL PLATED.  
SPRING: SPRING STEEL, NICKEL PLATED.  
CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER  
EIA-540J000  
ROHS 2 COMPLIANT