



AME1117

General Description

The AME1117 is a 1A low-dropout positive voltage regulator. It is available in fixed and adjustable output voltage versions. Overcurrent and thermal protection are integrated onto the chip. Output current will limit as while it reaches the pre-set current or temperature limit. The dropout voltage is specified at 1.4V Maximum at full rated output current. The AME1117 series provides excellent regulation over line, load and temperature variations.


Features

- Low Dropout Voltage ----- 1.4V at 1A
- Adjustable or Fixed Voltages: 1.8V, 2.5V, 3.3V, 5.0V
- Adjust Pin Current Less than 120µA
- Overcurrent Protection
- Thermal Protection
- Available in TO-220, TO-252, SOT-223
- All AME's Lead Free Products Meet RoHS Standards


Applications

- High Efficiency Linear Regulators
- Post Regulators for Switching Supplies
- 5V to 3.3V Voltage Converter
- Battery Charger

Functional Block Diagram

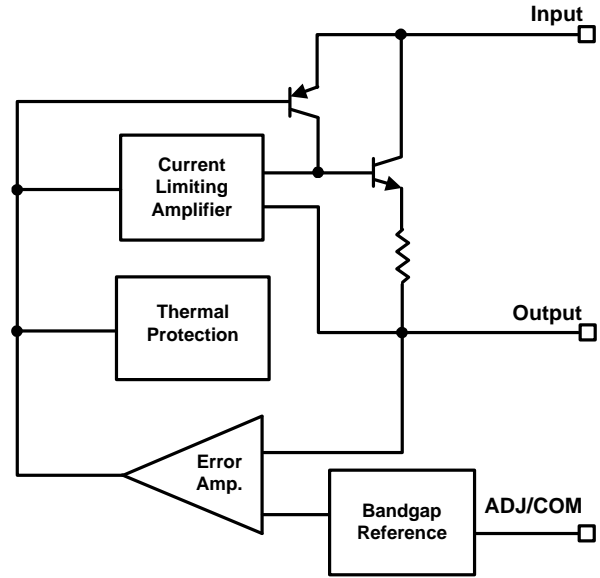


Typical Application

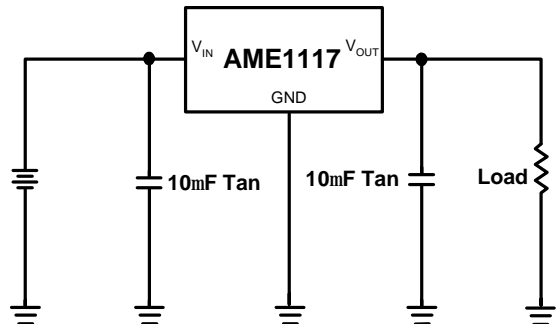



■ Pin Configuration

TO-220-3
Front View

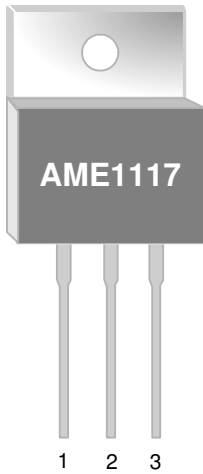


AME1117

- 1. ADJ/GND
- 2. OUT (TAB)
- 3. IN

* Die Attach:
Conductive Epoxy

SOT-223
Front View




AME1117

- 1. ADJ/GND
- 2. OUT (TAB)
- 3. IN

* Die Attach:
Conductive Epoxy

TO-252-2
Front View



AME1117


- 1. ADJ/GND
- 2. OUT (TAB)
- 3. IN

* Die Attach:
Conductive Epoxy



AME1117

■ Ordering Information

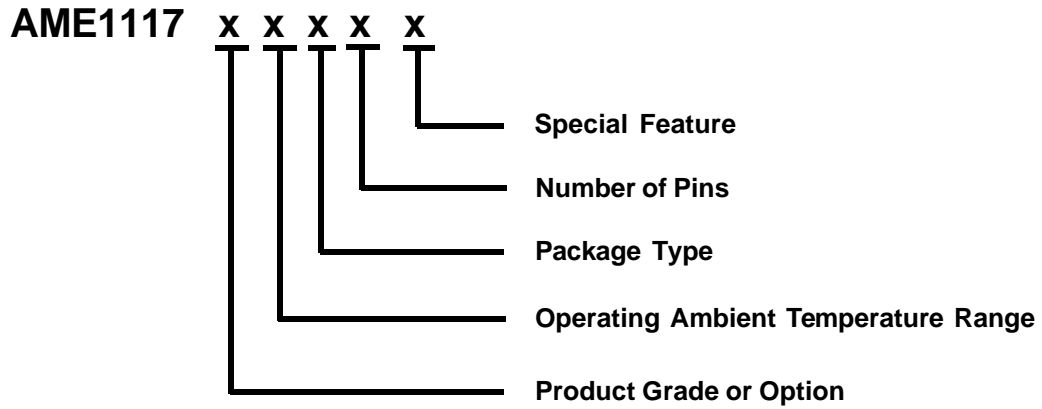

| Product Grade or Option | Operating Ambient Temperature Range | Package Type | Number of Pins | Special Feature |
|--|-------------------------------------|--------------------------------------|----------------|-----------------|
| A: ADJ B: 2.5V C: 3.3V D: 5.0V E: 1.8V | C: 0°C to 70°C | B: TO-220 C: TO-252 G: SOT-223 | T: 3 | Z: Lead Free |

■ Ordering Information (contd.)

| Part Number | Marking* | Output Voltage | Package | Operating Ambient Temperature Range |
|--------------|-------------------------|----------------|----------|-------------------------------------|
| AME1117ACGT | ABE ^y ww | ADJ | SOT-223 | 0°C to 70°C |
| AME1117ACGTZ | ABE ^y ww | ADJ | SOT-223 | 0°C to 70°C |
| AME1117BCGT | AKE ^y ww | 2.5 | SOT-223 | 0°C to 70°C |
| AME1117BCGTZ | AKE ^y ww | 2.5 | SOT-223 | 0°C to 70°C |
| AME1117CCGT | ABF ^y ww | 3.3 | SOT-223 | 0°C to 70°C |
| AME1117CCGTZ | ABF ^y ww | 3.3 | SOT-223 | 0°C to 70°C |
| AME1117DCGT | AKF ^y ww | 5.0 | SOT-223 | 0°C to 70°C |
| AME1117DCGTZ | AKF ^y ww | 5.0 | SOT-223 | 0°C to 70°C |
| AME1117ECGT | AXH ^y ww | 1.8 | SOT-223 | 0°C to 70°C |
| AME1117ECGTZ | AXH ^y ww | 1.8 | SOT-223 | 0°C to 70°C |
| AME1117ACCT | AME1117 ACCT yyww | ADJ | TO-252-2 | 0°C to 70°C |
| AME1117ACCTZ | AME1117 ACCT yyww | ADJ | TO-252-2 | 0°C to 70°C |
| AME1117BCCT | AME1117 BCCT yyww | 2.5 | TO-252-2 | 0°C to 70°C |
| AME1117BCCTZ | AME1117 BCCT yyww | 2.5 | TO-252-2 | 0°C to 70°C |
| AME1117CCCT | AME1117 CCCT yyww | 3.3 | TO-252-2 | 0°C to 70°C |
| AME1117CCCTZ | AME1117 CCCT yyww | 3.3 | TO-252-2 | 0°C to 70°C |

Note: yyww & yww represent the date code

* A line on top of the first letter represents lead free plating such as $\overline{\text{A}}$ ME1117.

Please consult AME sales office or authorized Rep./Distributor for the availability of output voltage and package type.

AME1117
■ Ordering Information

| Part Number | Marking* | Output Voltage | Package | Operating Ambient Temperature Range |
|--------------|-------------------------|----------------|----------|-------------------------------------|
| AME1117DCCT | AME1117 DCCT yyww | 5.0 | TO-252-2 | 0°C to 70°C |
| AME1117DCCTZ | AME1117 DCCT yyww | 5.0 | TO-252-2 | 0°C to 70°C |
| AME1117ECCT | AME1117 ECCT yyww | 1.8 | TO-252-2 | 0°C to 70°C |
| AME1117ECCTZ | AME1117 ECCT yyww | 1.8 | TO-252-2 | 0°C to 70°C |
| AME1117ACBT | AME1117 ACBT yyww | ADJ | TO-220 | 0°C to 70°C |
| AME1117ACBTZ | AME1117 ACBT yyww | ADJ | TO-220 | 0°C to 70°C |
| AME1117BCBT | AME1117 BCBT yyww | 2.5 | TO-220 | 0°C to 70°C |
| AME1117BCBTZ | AME1117 BCBT yyww | 2.5 | TO-220 | 0°C to 70°C |
| AME1117CCBT | AME1117 CCBT yyww | 3.3 | TO-220 | 0°C to 70°C |
| AME1117CCBTZ | AME1117 CCBT yyww | 3.3 | TO-220 | 0°C to 70°C |
| AME1117DCBT | AME1117 DCBT yyww | 5.0 | TO-220 | 0°C to 70°C |
| AME1117DCBTZ | AME1117 DCBT yyww | 5.0 | TO-220 | 0°C to 70°C |
| AME1117ECBT | AME1117 ECBT yyww | 1.8 | TO-220 | 0°C to 70°C |
| AME1117ECBTZ | AME1117 ECBT yyww | 1.8 | TO-220 | 0°C to 70°C |



■ Absolute Maximum Ratings

| Parameter | Package | Die Attach | Symbol | Maximum | Unit |
|---|----------|---------------------|---------------|------------|------|
| Thermal Resistance* (Junction to Case) | TO-220-3 | Conductive Epoxy | θ_{JC} | 6 | °C/W |
| | TO-252-2 | | | 5 | |
| | SOT-223 | | | 25 | |
| Thermal Resistance (Junction to Ambient) | TO-220-3 | Conductive Epoxy | θ_{JA} | 55 | |
| | TO-252-2 | | | 90 | |
| | SOT-223 | | | 120 | |
| Internal Power Dissipation | TO-220-3 | Conductive Epoxy | P_D | 2200 | mW |
| | TO-252-2 | | | 1200 | |
| | SOT-223 | | | 900 | |
| Input Voltage | | | V_{IN} | 12 | V |
| Operating Junction Temperature Range | | | T_J | 0 to 125 | °C |
| Storage Temperature Range | | | T_{STG} | -65 to 150 | °C |
| Solder Iron (10 Sec)** | | | | 350 | °C |

Caution: Stress above the listed absolute maximum rating may cause permanent damage to the device.

* Measure θ_{JC} on backside center of tab.

** MIL-STD-202G 210F

■ Electrical Specifications
AME1117Exxx

| Parameter | Symbol | Test Condition | Min | Typ | Max | Units | |
|------------------------|---------------|--|--|-------|-------|-------|---------------|
| Output Voltage | V_{OUT} | $V_{IN} = 5V, I_O = 0A$ | $T_J = 25^\circ C$ | 1.782 | 1.800 | 1.818 | V |
| | | | $T_J = 0^\circ C \text{ to } 70^\circ C$ | 1.764 | 1.800 | 1.836 | |
| Line Regulation | REG_{LINE} | $V_{IN} = 4.75V \text{ to } 7V,$ $I_O = 0A$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | - | - | 0.2 | % |
| Load Regulation | REG_{LOAD} | $V_{IN} = 5V,$ $I_O = 0A \sim 1A$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | - | 0.1 | 1.0 | |
| Dropout Voltage | $V_{DROPOUT}$ | $I_O = 1A,$ $\Delta V_O = \pm 1\%$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | - | 1.2 | 1.4 | V |
| Current Limit | I_S | $V_{IN} = 4.75V \text{ to } 7V$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | 1.0 | 1.5 | - | A |
| Quiescent Current | I_Q | $V_{IN} = 5V, I_O = 0A \text{ to } 1A$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | - | 6.0 | 13 | mA |
| Temp. Coefficient | T_C | $V_{IN} = 4.75V \text{ to } 7V, I_O = 0A \text{ to } 1A$ | | - | 0.005 | - | %/ $^\circ C$ |
| Temperature Stability | T_S | $V_{IN} = 5V, I_O = 100mA$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | - | 0.5 | - | % |
| RMS Output Noise | V_N | $10Hz \leq f \leq 10KHz$ | $T_J = 25^\circ C$ | - | 0.003 | - | % V_O |
| Ripple Rejection Ratio | R_A | $V_{IN} = 5V, I_O = 1A$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | 60 | 72 | - | dB |

AME1117Dxxx

| Parameter | Symbol | Test Condition | Min | Typ | Max | Units | |
|------------------------|---------------|--|--|-------|-------|-------|---------------|
| Output Voltage | V_{OUT} | $V_{IN} = 7V, I_O = 0A$ | $T_J = 25^\circ C$ | 4.950 | 5.000 | 5.050 | V |
| | | | $T_J = 0^\circ C \text{ to } 70^\circ C$ | 4.900 | 5.000 | 5.100 | |
| Line Regulation | REG_{LINE} | $V_{IN} = 7V \text{ to } 9V,$ $I_O = 0A$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | - | - | 0.2 | % |
| Load Regulation | REG_{LOAD} | $V_{IN} = 7V$ $I_O = 0A \sim 1A$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | - | 0.1 | 1.0 | |
| Dropout Voltage | $V_{DROPOUT}$ | $I_O = 0A \text{ to } 1A,$ $\Delta V_O = \pm 1\%$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | - | 1.2 | 1.4 | V |
| Current Limit | I_S | $V_{IN} = 7V \text{ to } 10V$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | 1.0 | 1.5 | - | A |
| Quiescent Current | I_Q | $V_{IN} = 7V, I_O = 0A \text{ to } 1A$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | - | 6.0 | 13 | mA |
| Temp. Coefficient | T_C | $V_{IN} = 7V \text{ to } 10V, I_O = 0A \text{ to } 1A$ | | - | 0.005 | - | %/ $^\circ C$ |
| Temperature Stability | T_S | $V_{IN} = 5V, I_O = 100mA$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | - | 0.5 | - | % |
| RMS Output Noise | V_N | $10Hz \leq f \leq 10KHz$ | $T_J = 25^\circ C$ | - | 0.003 | - | % V_O |
| Ripple Rejection Ratio | R_A | $V_{IN} = 5V, I_O = 1A$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | 60 | 72 | - | dB |

■ Electrical Specifications
AME1117Cxxx

| Parameter | Symbol | Test Condition | Min | Typ | Max | Units | |
|------------------------|---------------|--|--|-------|-------|-------|---------------|
| Output Voltage | V_{OUT} | $V_{IN} = 5V, I_O = 0A$ | $T_J = 25^\circ C$ | 3.270 | 3.300 | 3.330 | V |
| | | | $T_J = 0^\circ C \text{ to } 70^\circ C$ | 3.234 | 3.300 | 3.366 | |
| Line Regulation | REG_{LINE} | $V_{IN} = 4.75V \text{ to } 7V,$ $I_O = 0A$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | - | - | 0.2 | % |
| Load Regulation | REG_{LOAD} | $V_{IN} = 5V$ $I_O = 0A \text{ to } 1A$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | - | 0.1 | 1.0 | |
| Dropout Voltage | $V_{DROPOUT}$ | $I_O = 0A \text{ to } 1A,$ $\Delta V_O = \pm 1\%$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | - | 1.2 | 1.4 | V |
| Current Limit | I_S | $V_{IN} = 4.75V \text{ to } 7V$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | 1.0 | 1.5 | - | A |
| Quiescent Current | I_Q | $V_{IN} = 5V, I_O = 0A \text{ to } 1A$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | - | 6.0 | 13 | mA |
| Temp. Coefficient | T_C | $V_{IN} = 4.75V \text{ to } 7V, I_O = 0A \sim 1A$ | | - | 0.005 | - | %/ $^\circ C$ |
| Temperature Stability | T_S | $V_{IN} = 5V, I_O = 100mA$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | - | 0.5 | - | % |
| RMS Output Noise | V_N | $10Hz < f < 10KHz$ | $T_J = 25^\circ C$ | - | 0.003 | - | % V_O |
| Ripple Rejection Ratio | R_A | $V_{IN} = 5V, I_O = 1A$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | 60 | 72 | - | dB |

AME1117Bxxx

| Parameter | Symbol | Test Condition | Min | Typ | Max | Units | |
|------------------------|---------------|--|--|-------|-------|-------|---------------|
| Output Voltage | V_{OUT} | $V_{IN} = 5V, I_O = 0A$ | $T_J = 25^\circ C$ | 2.475 | 2.500 | 2.525 | V |
| | | | $T_J = 0^\circ C \text{ to } 70^\circ C$ | 2.450 | 2.500 | 2.550 | |
| Line Regulation | REG_{LINE} | $V_{IN} = 4.75V \text{ to } 7V,$ $I_O = 0A$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | - | - | 0.2 | % |
| Load Regulation | REG_{LOAD} | $V_{IN} = 5V$ $I_O = 0A \text{ to } 1A$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | - | 0.1 | 1.0 | |
| Dropout Voltage | $V_{DROPOUT}$ | $I_O = 0A \text{ to } 1A,$ $\Delta V_O = \pm 1\%$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | - | 1.2 | 1.4 | V |
| Current Limit | I_S | $V_{IN} = 4.75V \text{ to } 7V$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | 1.0 | 1.5 | - | A |
| Quiescent Current | I_Q | $V_{IN} = 5V, I_O = 0A \text{ to } 1A$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | - | 6.0 | 13 | mA |
| Temp. Coefficient | T_C | $V_{IN} = 4.75V \text{ to } 7V, I_O = 0A \sim 1A$ | | - | 0.005 | - | %/ $^\circ C$ |
| Temperature Stability | T_S | $V_{IN} = 5V, I_O = 100mA$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | - | 0.5 | - | % |
| RMS Output Noise | V_N | $10Hz < f < 10KHz$ | $T_J = 25^\circ C$ | - | 0.003 | - | % V_O |
| Ripple Rejection Ratio | R_A | $V_{IN} = 5V, I_O = 1A$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | 60 | 72 | - | dB |


AME1117

■ Electrical Specifications

AME1117Axxx

| Parameter | Symbol | Test Condition | Min | Typ | Max | Units | |
|---------------------------|------------------|---|--|-------|-------|-------|---------------|
| Reference Voltage | V_{REF} | $V_{IN} = 5V,$ $I_O = 10mA$ | $T_J = 25^\circ C$ | 1.238 | 1.250 | 1.262 | V |
| | | | $T_J = 0^\circ C \text{ to } 70^\circ C$ | 1.225 | 1.250 | 1.275 | |
| Line Regulation * | REG_{LINE} | $V_{IN} = 4.75V \text{ to } 7V,$ $I_O = 10mA$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | - | - | 0.2 | % |
| Load Regulation | REG_{LOAD} | $V_{IN} = 5V,$ $I_O = 10mA \text{ to } 1A$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | - | 0.1 | 1.0 | |
| Dropout Voltage | $V_{DROPOUT}$ | $I_O = 10mA \text{ to } 1A,$ $\Delta V_O = \pm 1\%$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | - | 1.2 | 1.4 | V |
| Current Limit | I_S | $V_{IN} = 2.7V \text{ to } 7V$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | 1.0 | 1.5 | - | A |
| Temp. Coefficient | T_C | $V_{IN} = 2.75V \text{ to } 7V, I_O = 10mA \text{ to } 1A$ | | - | 0.005 | - | %/ $^\circ C$ |
| Adjust Pin Current | I_{ADJ} | $V_{IN} = 2.75V \text{ to } 7V,$ $I_O = 10mA \text{ to } 1A$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | - | 55 | 120 | μA |
| Adjust Pin Current Change | ΔI_{ADJ} | $V_{IN} = 2.75V \text{ to } 7V,$ $I_O = 10mA \text{ to } 1A$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | - | 0.2 | 5.0 | |
| Temperature Stability | T_S | $V_{IN} = 5V, I_O = 100mA$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | - | 0.5 | | % |
| Minimum Load Current | I_O | $V_{IN} = 5V$ | | - | 5.0 | 10 | mA |
| RMS Output Noise | V_N | $10Hz \leq f \leq 10KHz$ | $T_J = 25^\circ C$ | - | 0.003 | - | % V_O |
| Ripple Rejection Ratio | R_A | $V_{IN} = 5V, I_O = 1A$ | $T_J = 0^\circ C \text{ to } 70^\circ C$ | 60 | 72 | - | dB |

***Line regulation test circuit**

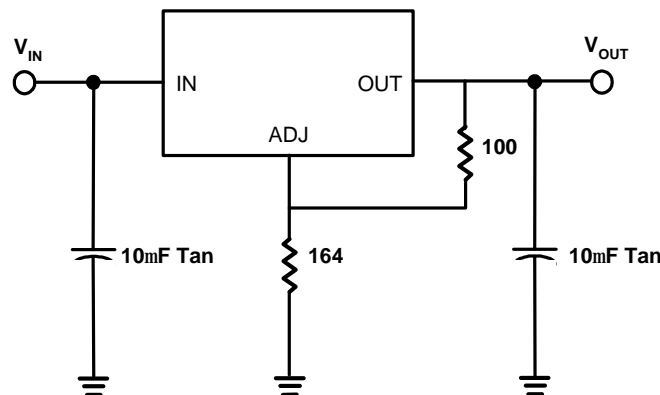


■ Application Description

1. Output Voltage Adjustment

Like most regulators, the AME1117 regulates the output by comparing the output voltage to an internally generated reference voltage. On the adjustable version, the V_{REF} is available externally as 1.25V between V_{OUT} and ADJ. The voltage ratio formed by R1 and R2 should be set to conduct 10mA (minimum output load). The output voltage is given by the following equation:

$$V_{OUT} = V_{REF} \left(1 + \frac{R2}{R1} \right) + I_{ADJ} \times R2$$

On fixed versions of AME1117, the voltage divider is provided internally.

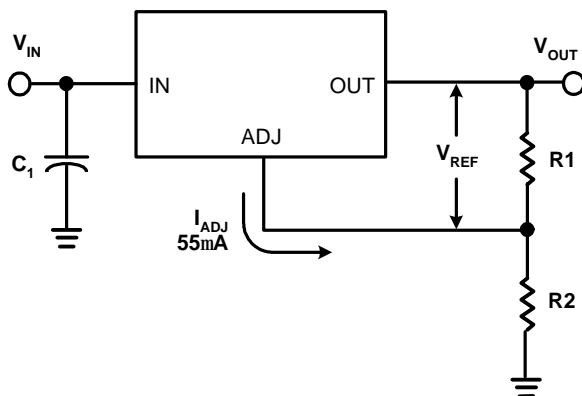

$$V_{OUT} = V_{REF} \left(1 + \frac{R2}{R1} \right) + I_{ADJ} \times R2$$

2. Thermal Protection

AME1117 has thermal protection which limits junction temperature to 150°C. However, device functionality is only guaranteed to a maximum junction temperature of +125°C.

The power dissipation and junction temperature for AME1117 is given by

$$P_D = (V_{IN} - V_{OUT}) \times I_{OUT}$$

$$T_{JUNCTION} = T_{AMBIENT} + (P_D \times \theta_{JA})$$

Note: $T_{JUNCTION}$ must not exceed 125°C

3. Current Limit Protection

AME1117 is protected against overload conditions. Current protection is triggered at typically 1.5A.

4. Stability and Load Regulation


AME1117 requires a capacitor from V_{OUT} to GND to provide compensation feedback to the internal gain stage. This is to ensure stability at the output terminal. Typically, a 10µF tantalum or 50µF aluminum electrolytic is sufficient.

(Note: It is important that the ESR for this capacitor does not exceed 0.5W.)

The output capacitor does not have a theoretical upper limit and increasing its value will increase stability. $C_{OUT} = 100\mu\text{F}$ or more is typical for high current regulator design.

For the adjustable version, the best load regulation is accomplished when the top of the resistor divider (R1) is connected directly to the output pin of the AME1117. When so connected, R_p is not multiplied by the divider ratio.

For fixed output versions, the top of R1 is internally connected to the output. The ground pin can be connected to the low side of the load in order to eliminate ground loop errors.

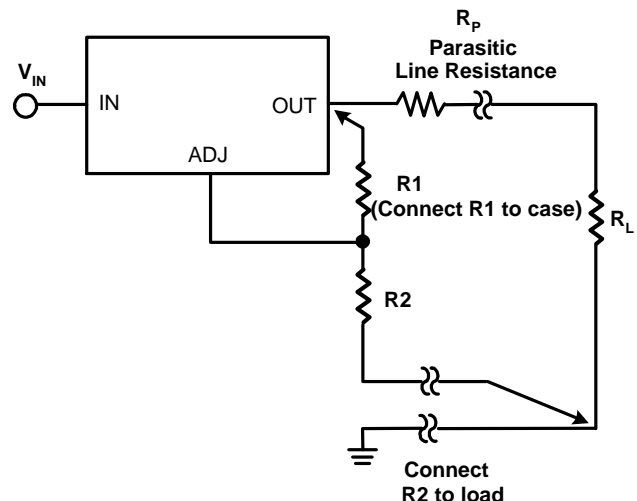




AME1117

5. Thermal Consideration


The AME1117 series contain thermal limiting circuitry designed to protect itself from over-temperature conditions. Even for normal load conditions, maximum junction temperature ratings must not be exceeded. As mentioned in thermal protection section, we need to consider all sources of thermal resistance between junction and ambient. It includes junction-to-case, case-to-heat-sink interface and heat sink thermal resistance itself.

Junction-to-case thermal resistance is specified from the IC junction to the bottom of the case directly below the die. Proper mounting is required to ensure the best possible thermal flow from this area of the package to the heat sink. The case of all devices in this product series is electrically connected to the output. Therefore, if the case of the device must be electrically isolated, a thermally conductive spacer is recommended.

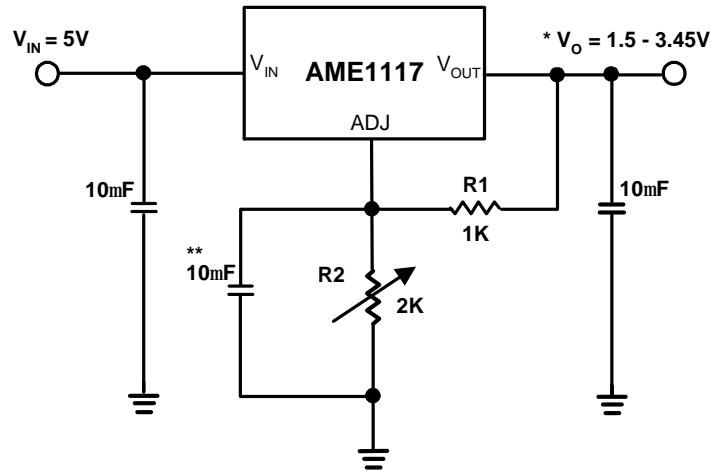■ Advanced Applications (contd.)
Adjustable Output Voltage


Note: $* V_{OUT} = V_{REF} \left(1 + \frac{R2}{R1} \right) + I_{ADJ} \times R2$


** Optional for improved ripple rejection

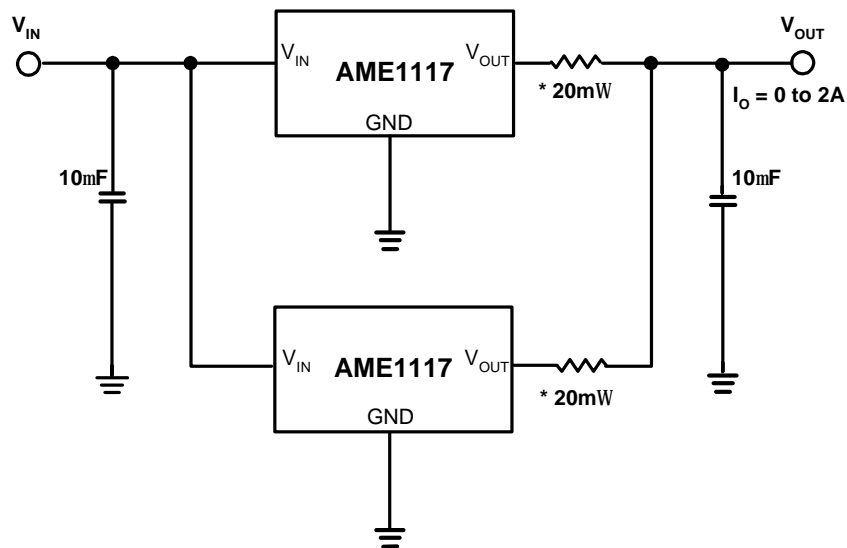Paralleling Regulators


Note: * 20mΩ is ballast resistance
The inter - connection of #18 wire could act as ballast resistance


■ Advanced Applications

Regulator with Reference

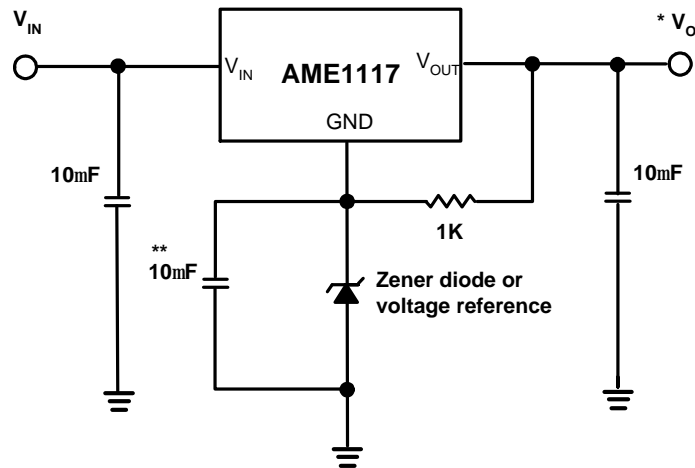


Note: * $V_O = V_{REF} + V_Z$ (V_Z : breakdown voltage of Zener diode)
 ** Optional for improved ripple rejection

Regulator with Reverse Diode Protection

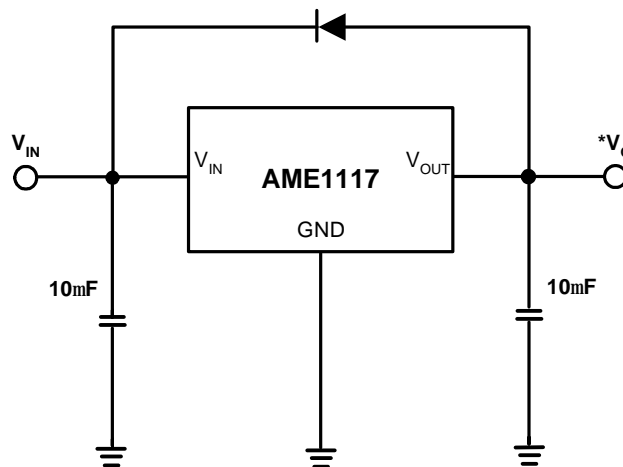





Temperature Stability
(For Fixed Voltage)

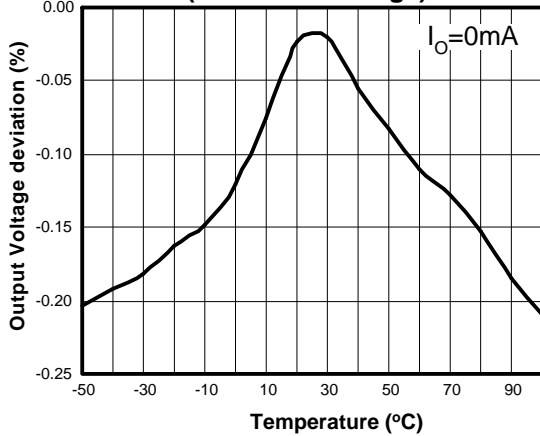


Temperature Stability
(For Adjustable Voltage)

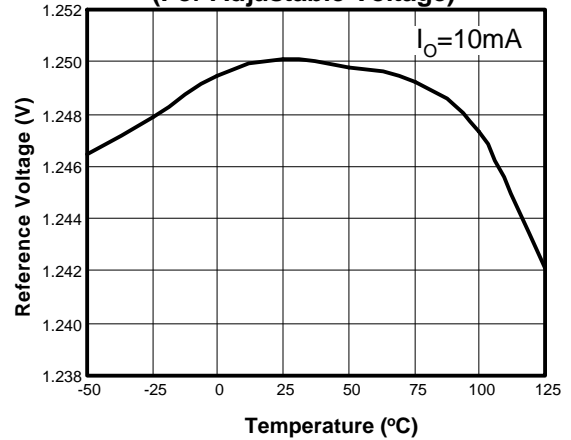


Short Circuit Current

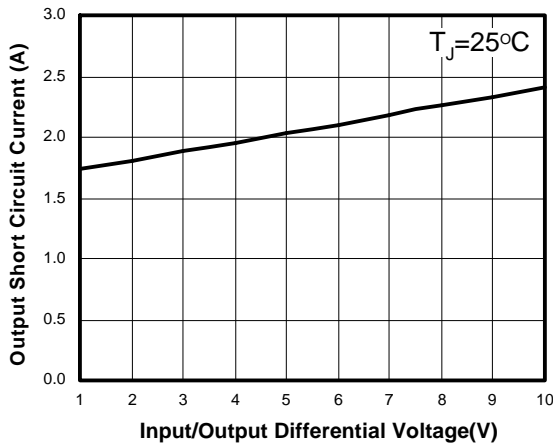


Dropout Voltage

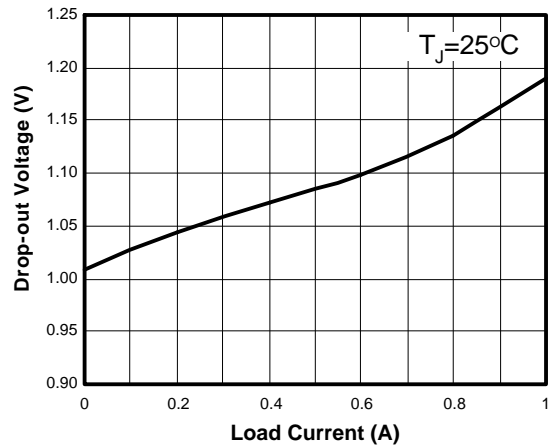

Adjust Pin Current

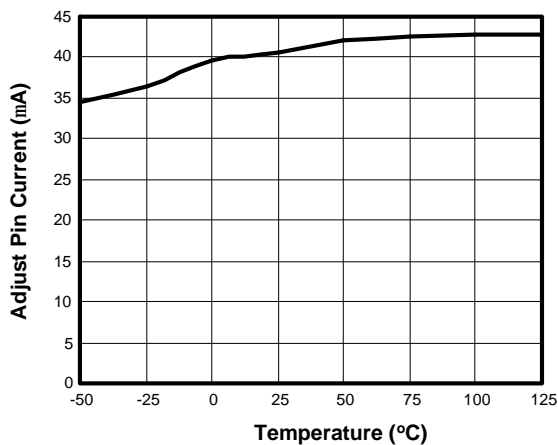


Minimum Operating Current

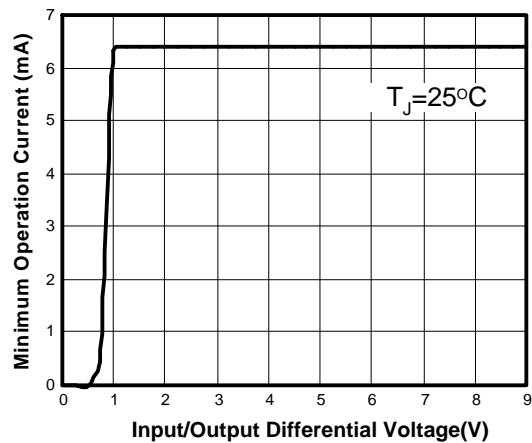





Load Transient Response

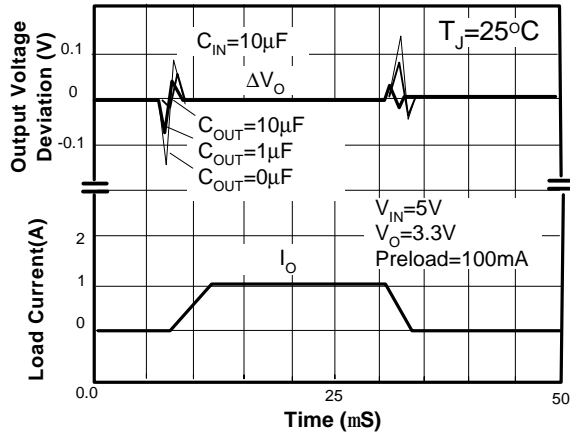


Line Transient Response

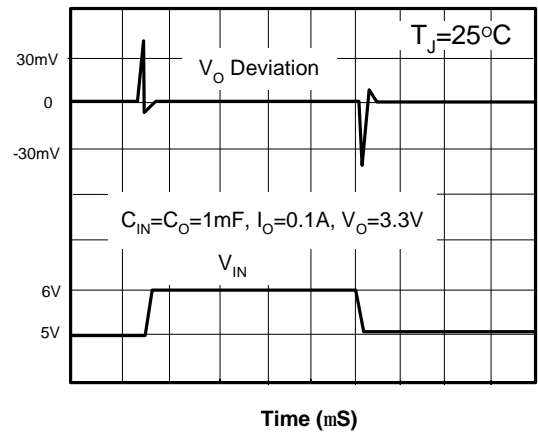


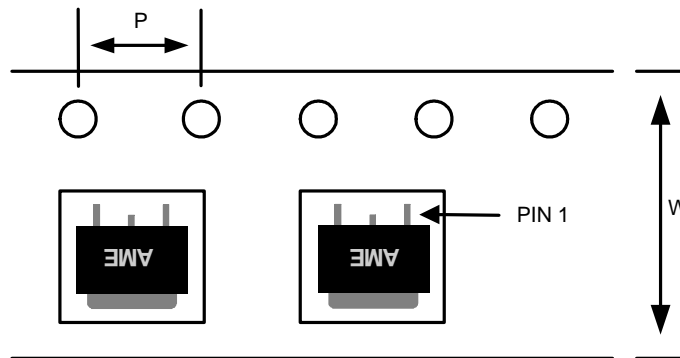AME1117
■ Tape and Reel Dimension
TO-252-2

Carrier Tape, Number of Components Per Reel and Reel Size

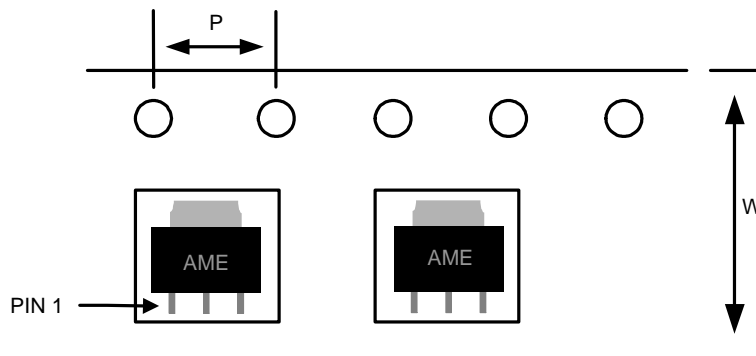
| Package | Carrier Width (W) | Pitch (P) | Part Per Full Reel | Reel Size |
|----------|-------------------|------------|--------------------|-----------|
| TO-252-2 | 16.0±0.1 mm | 4.0±0.1 mm | 2500pcs | 330±1 mm |

SOT-223

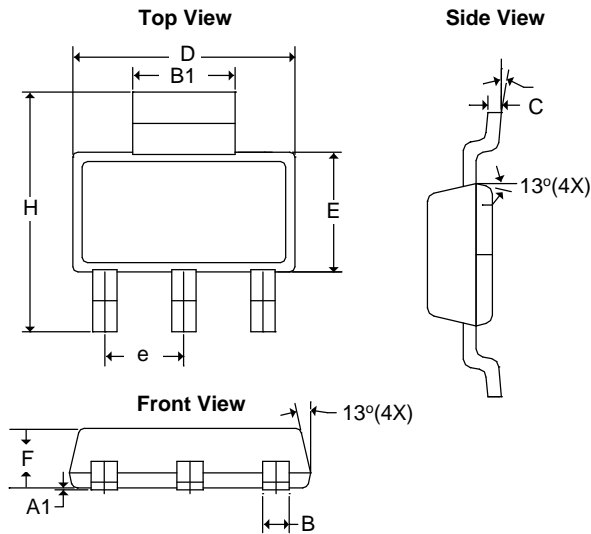Carrier Tape, Number of Components Per Reel and Reel Size


| Package | Carrier Width (W) | Pitch (P) | Part Per Full Reel | Reel Size |
|---------|-------------------|------------|--------------------|-----------|
| SOT-223 | 12.0±0.1 mm | 4.0±0.1 mm | 2500pcs | 330±1 mm |

■ Package Dimension
SOT-223

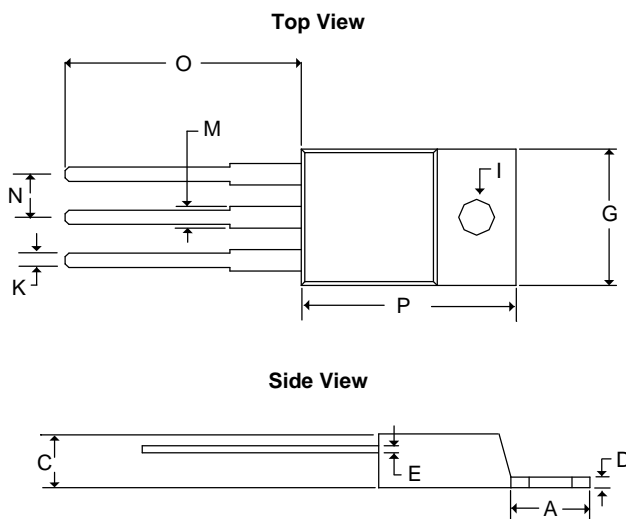
| SYMBOLS | MILLIMETERS | | INCHES | |
|----------------|-------------|------|------------|--------|
| | MIN | MAX | MIN | MAX |
| A ₁ | 0.01 | 0.10 | 0.0004 | 0.0039 |
| B | 0.60 | 0.84 | 0.0236 | 0.0330 |
| B ₁ | 2.90 | 3.15 | 0.1140 | 0.1240 |
| C | 0.24 | 0.38 | 0.0094 | 0.0150 |
| D | 6.30 | 6.71 | 0.2480 | 0.2640 |
| E | 3.30 | 3.71 | 0.1299 | 0.1460 |
| F | 1.40 | 1.80 | 0.0551 | 0.0709 |
| e | 2.30 BSC | | 0.0906 BSC | |
| H | 6.70 | 7.30 | 0.2638 | 0.2874 |
| q | 0° | 10° | 0° | 10° |

TO-220-3


| SYMBOLS | MILLIMETERS | | INCHES | |
|---------|-------------|-------|--------|--------|
| | MIN | MAX | MIN | MAX |
| A | 5.58 | 7.49 | 0.2197 | 0.2949 |
| C | 2.03 | 4.83 | 0.0800 | 0.1902 |
| D | 0.50 | 1.40 | 0.0197 | 0.0550 |
| E | 0.30 | 1.15 | 0.0118 | 0.0453 |
| G | 9.65 | 10.67 | 0.3799 | 0.4200 |
| I | 3.53 | 4.09 | 0.1390 | 0.1610 |
| K | 0.50 | 1.15 | 0.0197 | 0.0453 |
| M | 1.14 | 1.78 | 0.0449 | 0.0700 |
| N | 2.28 | 2.80 | 0.0898 | 0.1102 |
| O | 12.70 | 14.74 | 0.5000 | 0.5803 |
| P | 14.22 | 16.51 | 0.5600 | 0.6500 |

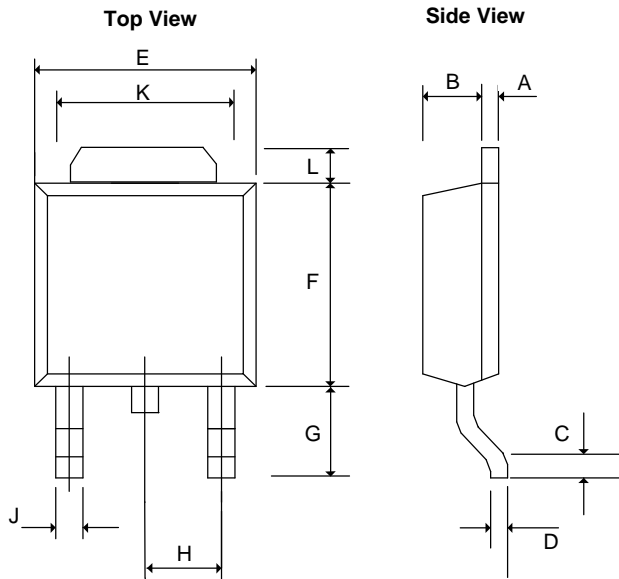■ Package Dimension
TO-252-2


| SYMBOLS | MILLIMETERS | | INCHES | |
|----------|-------------|--------|----------|---------|
| | MIN | MAX | MIN | MAX |
| A | 0.43 | 0.58 | 0.0169 | 0.0230 |
| B | 1.60 | 1.95 | 0.0630 | 0.0768 |
| C | 0.51 | 1.78 | 0.0200 | 0.0701 |
| D | 0.43 | 0.60 | 0.0169 | 0.0236 |
| E | 6.35 | 6.80 | 0.2500 | 0.2677 |
| F | 5.36 | 7.20 | 0.2110 | 0.2835 |
| G | 2.20 | 3.00 | 0.0866 | 0.1181 |
| H | - | * 2.30 | - | *0.0906 |
| J | - | 0.97 | - | 0.0380 |
| K | 5.20 | 5.50 | 0.2047 | 0.2165 |
| L | 1.40REF | | 0.055REF | |

*: **Typical Value**

Notes:

1. Controlling dimension: Millimeters.

2. Maximum lead thickness includes lead finish thickness. Minimum lead thickness is the minimum thickness of base material.



www.ame.com.tw
E-Mail: sales@ame.com.tw

Life Support Policy:

These products of AME, Inc. are not authorized for use as critical components in life-support devices or systems, without the express written approval of the president of AME, Inc.

AME, Inc. reserves the right to make changes in the circuitry and specifications of its devices and advises its customers to obtain the latest version of relevant information.

© AME, Inc. , July 2007

Document: 1014-DS1117-S.02

Corporate Headquarter

AME, Inc.

2F, 302 Rui-Guang Road, Nei-Hu District
Taipei 114, Taiwan.

Tel: 886 2 2627-8687

Fax: 886 2 2659-2989

U.S.A.(Subsidiary)

Analog Microelectronics, Inc.

3100 De La Cruz Blvd., Suite 201
Santa Clara, CA. 95054-2438

Tel : (408) 988-2388

Fax: (408) 988-2489